



Compulink

Symbol P360 Memory Scanner Operation Instruction

Thank you for purchasing the Symbol P360 Memory Scanner. This scanner has been pre-programmed by Compulink for your convenience. The programming allows the user to collect, upload or delete data by depressing only a few keys. A keyboard wedge has been included with this product to allow the scanned items to be uploaded to your computer and Compulink software. *(The battery is normally charged by Compulink prior to shipment and will continue to charge while connected to the adapter cable and power supply. Refer to your manual provided on the floppy disk for all required maintenance)*

CONNECTING YOUR PHASER:

1. Connect the "Y" of the Synapse Adapter to PC and The Keyboard.
2. Connect the Adaptor to the Synapse Interface Cable.
3. Connect the Synapse adaptor cable's flying power lead to the receptacle in the synapse interface cable as shown in figure A.
4. Connect the power supply to the Adapter Cable.

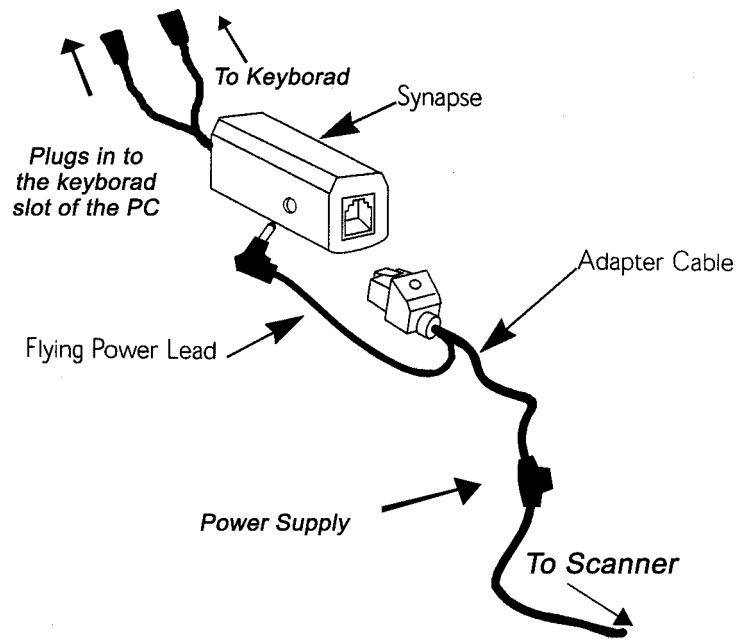


Figure "A" - Synapse and Adapter cable

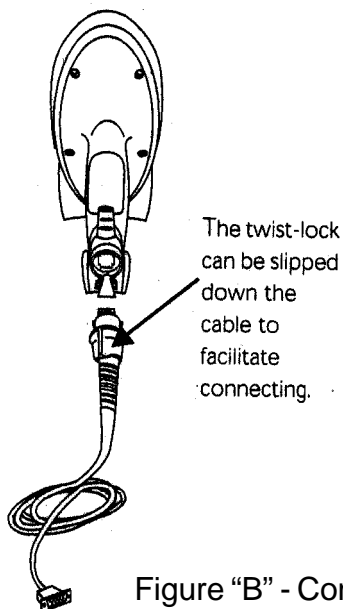



Figure "B" - Connecting the cable to the Phaser

5. Plug the modular connector on the cable into the receptacle in the bottom of the Phaser handle. (figure "B")

6. Turn the cable twist-lock 1/8 turn clockwise to seat it and gently pull the cable to make certain it is properly seated. (figure "C")

OPERATING YOUR PHASER:

Once your Phaser is powered up and connected to the cable, it will display the following message on the screen:

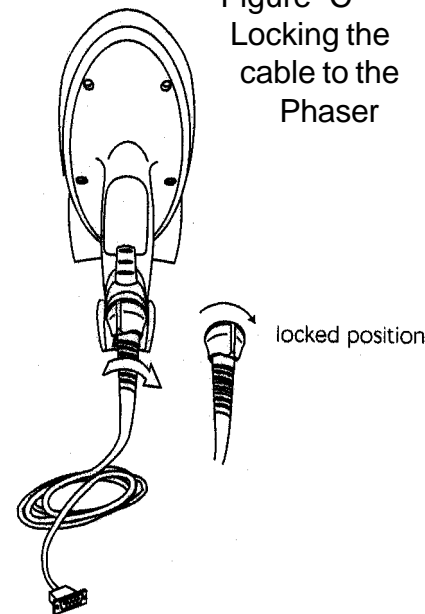

SKU:
 ^ -----

Your phaser is ready to be used in tethered (attached) mode.

To use the Phaser in portable (batch) mode, disconnect the cable from the Phaser (refer to figures "B" and "C") and your Phaser will function as a memory scanner automatically.

The following message will be displayed in memory scan mode:

SCAN: ^ -----

Proceed with scanning all necessary barcodes. Once completed, return the Phaser and connect it to the cable while connected to your PC. On the keypad of the phaser, press the **FUNC 1** to upload the data to the Compulink program. (figure "D")

The following message will be displayed:

**UPLOADING DATA.
 PLEASE WAIT....**

Once the Data is uploaded, the following message is displayed:

Success! Erase Data?
(EN)=Y (BK)=N

(EN) = Enter button on the keypad. All data will be erased from Phaser memory
 (BK) = BK button on the keypad. All data will be saved in memory

CAUTION: DO NOT ATTEMPT TO REPROGRAM YOUR PHASER OR CHANGE ANY OF IT'S SETTINGS. YOUR SCANNER COULD STOP FUNCTIONING PROPERLY. THERE IS A FEE FOR REPROGRAMMING THE SCANNER BY COMPULINK.

